

BLENDAlRE

LPG/AIR MIXER
Models: B3 through B7

Factory Mutual System
Approved


OPERATION

The **SDI BLENDAlRE**® LPG/Air mixer safely and accurately combines LPG vapor with compressed air to deliver a natural gas compatible mixture at pressures from 10 psig [0.7 kg/cm] to 150 psig [10.3 kg/cm]. The LPG/air mixture created by the **BLENDAlRE**® will burn with the same characteristics and efficiency as natural gas plus it does not require burner adjustments.

The **BLENDAlRE** offers high pressure mixing to feed city utilities or supplement natural gas pipeline distribution. The heart of the **BLENDAlRE** is a piston suspended within a three port mixing valve. Compressed air enters one port. LPG vapor enters another port, and a mixture of LPG/air that is compatible with natural gas discharges from the third port. Horizontal rotation of the piston increases or decreases the volumetric ratio of LPG vapor to air, hence increasing or decreasing the calorific value of the LPG/Air mixture within a tolerance +/-2%. Vertical travel of the piston increases or decreases the volumetric flow of LPG/Air. Since the **BLENDAlRE** is pressure balanced, it responds quickly to load changes. Both the air line and LPG vapor line have check valves to ensure safe mixing. In addition, sufficient air pressure must be available before the gas regulator will open to allow the mixing process to proceed.

STANDARD FEATURES

- Meets the design requirements of NFPA Pamphlet 58 for gas/air mixers.
- All wiring, controls, electrical components and their installation comply with recognized code standards defined in NFPA Pamphlets 58 and 70.
- Explosion proof configuration, suitable for Class I, Division 1, Group D environments.
- Factory Mutual (FM) Approved.
- Remote mounted **PROCESS CONTROLLER** (Control Panel) with integral first out annunciator.
 - Air pressure display
 - Inlet LPG pressure display
 - Inlet LPG temperature display
 - Differential pressure alarm
 - Vaporizer limits alarm
- Explosion proof junction box with terminal strip for easy field connection to **PROCESS CONTROLLER**.
- Air actuated automatic safety shutoff valve.
- High turndown ratio.
- Smooth and rapid response to flow rate changes.
- Manual ratio adjustment or optional automatic ratio control package.
- Skid mounted and complete with all operating and safety controls.
- Rigorous factory testing under strict ISO9001 conditions.


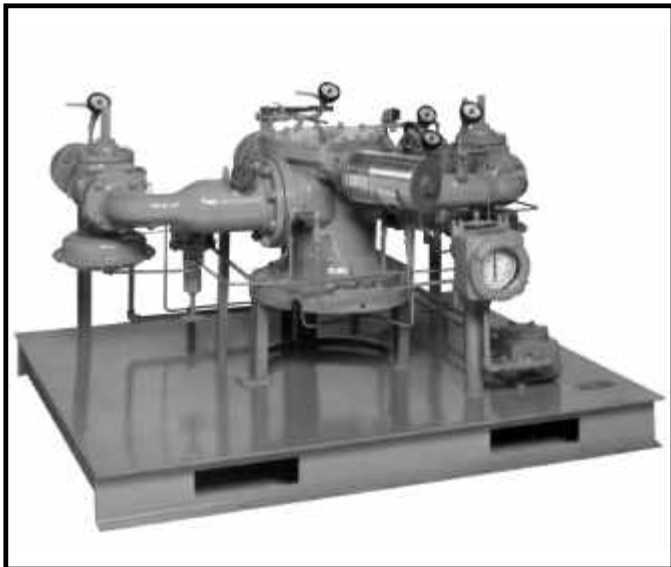


S P E C I F I C A T I O N S


MODEL		B3	B4	B5	B6	B7					
OUTLET PRESS.		HEAT VALUE CAPACITY IN MILLIONS (000,000)									
PSIG	KG/CM	BTU/H	KCAL/H	BTU/H	KCAL/H	BTU/H	KCAL/H	BTU/H	KCAL/H	BTU/H	KCAL/H
10	0.7	16.0	4.0	32.0	8.1	64.0	16.1	160.0	40.3	336.0	84.5
20	1.4	19.0	4.8	38.0	9.6	76.0	19.2	190.0	47.9	392.0	99.6
30	2.1	21.5	5.4	43.0	10.8	86.0	21.7	215.0	54.2	450.0	113.4
40	2.8	24.0	6.1	48.0	12.1	96.0	24.2	240.0	60.5	504.0	126.8
50	3.5	26.0	6.6	52.0	13.1	104.0	26.2	260.0	65.5	546.0	137.4
60	4.2	28.0	7.1	56.0	14.1	112.0	28.2	280.0	70.6	588.0	148.0
70	4.9	30.0	7.6	60.0	15.1	120.0	30.2	300.0	75.6	624.0	157.0
80	5.6	31.5	7.9	63.0	15.9	126.0	31.8	315.0	79.4	660.0	166.1
90	6.3	33.0	8.3	66.0	16.6	132.0	33.3	330.0	83.2	696.0	175.1
100	7.0	34.5	8.7	69.0	17.4	138.0	34.8	345.0	86.9	726.0	182.6
110	7.7	36.0	9.1	72.0	18.1	144.0	36.3	360.0	90.7	756.0	190.2
120	8.4	37.0	9.3	75.0	18.9	150.0	37.8	375.0	94.5	786.0	197.8
130	9.1	39.0	9.8	78.0	19.6	155.0	39.1	390.0	98.3	816.0	205.3
140	9.8	40.0	10.1	80.0	20.2	160.0	40.3	400.0	100.8	846.0	212.9
150	10.6	41.0	10.3	83.0	20.9	165.0	41.6	415.0	104.6	870.0	218.9

Capacity ratings valid for LPG/Air mixtures from 1,000 BTU/scf. to 1,700 BTU/scf. (8,900 kcal/nm to 15,130 kcal/nm).

DIMENSIONAL DRAWING

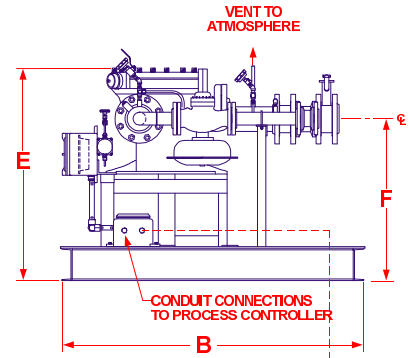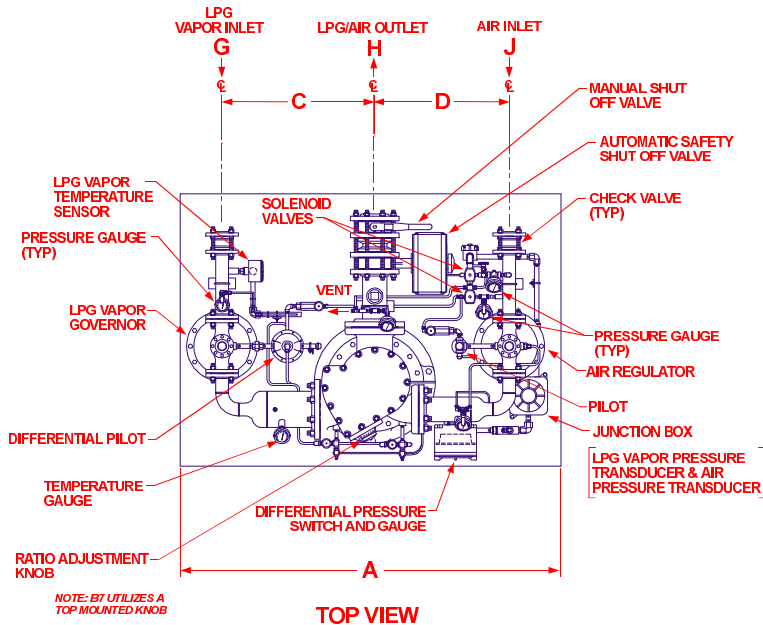

SIDE VIEW




PROCESS CONTROLLER
REMOTE MOUNTED CONTROL PANEL

FILE: BLSPEC1C.DWG

MODEL	A	B	C	D	E	F	G*	H*	J*
B3	58" 1473 mm	46" 1168 mm	21-3/4" 552 mm	20-3/8" 517 mm	26-1/8" 664 mm	21-3/8" 542 mm	2" FLG	2" FLG	2" FLG
B4	58" 1473 mm	46" 1168 mm	23-1/2" 596 mm	21" 533 mm	29-5/8" 752 mm	23-7/8" 606 mm	2" FLG	2" FLG	2" FLG
B5	64" 1625 mm	45" 1143 mm	24-3/8" 619 mm	22-7/8" 581 mm	31-1/2" 800 mm	24-1/4" 615 mm	2" FLG	3" FLG	2" FLG
B6	70" 1778 mm	50" 1270 mm	28-1/2" 725 mm	24-7/8" 632 mm	39" 990 mm	29-3/4" 756 mm	3" FLG	4" FLG	3" FLG
B7	88" 2236 mm	70" 1778 mm	38-1/2" 978 mm	36-1/2" 927 mm	45-1/4" 1150 mm	33-1/4" 844 mm	4" FLG	6" FLG	4" FLG

*150# ANSI RF50 mating flanges are provided for air inlet, LPG vapor inlet and mixed gas outlet.

NOTE: Dimensions shown are standardized for reference only; dimensions and arrangement may vary according to specific flow sizing requirements.

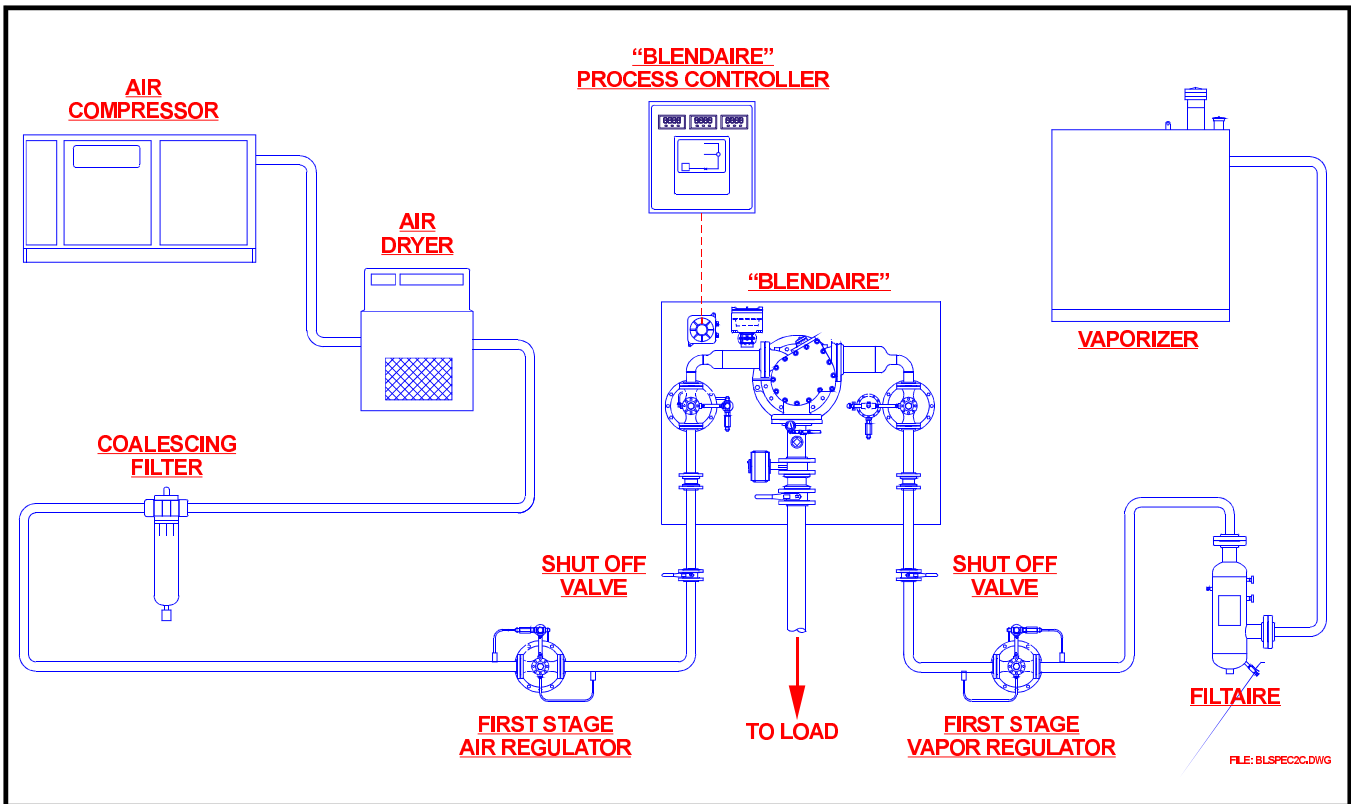

WARRANTY

Sam Dick Industries, Inc. warrants that the equipment is free of defects in materials and workmanship under normal use and service and agrees to repair or replace, at **Sam Dick Industries'** option, without charge, f.o.b. factory, any part which shall prove defective to the satisfaction of **Sam Dick Industries** within one (1) year from the date of original installation or eighteen (18) months from the date of shipment, whichever is the earlier. Equipment, which in the opinion of **Sam Dick Industries**, has been damaged by improper installation or operation, or has been abused or tampered with in any way, will not be accepted for return under warranty. **Sam Dick Industries** will not accept back charges for work performed by others upon or in conjunction with **Sam**

Dick Industries' equipment unless prior authorization is given by means of a **Sam Dick Industries'** purchase order. **Sam Dick Industries** shall not be liable for loss of anticipated profits, loss by reason of shutdown, non-operation or increased expense of operation of other equipment, or any other loss or damage of any nature, whether direct or consequential arising from any cause whatsoever.

Sam Dick Industries makes no other warranty of any kind whatsoever expressed or implied; and all warranties of merchantability and fitness for a particular purpose are hereby disclaimed by **Sam Dick Industries** and excluded from these terms of sale.



BLENDAIRE[®] is a registered U.S. trademark of **Sam Dick Industries**.



Represented By:
 Power Equipment Company
 2011 Williamsburg Road
 Richmond, VA 23231
 Tel: 804-236-3800
 Fax: 804-236-3882
 e-mail: sales@peconet.com