

ThermAir Burners

Model TA015 version 1.00

Main Specifications - TA015

PARAMETER		SPECIFICATIONS	
		English	Metric
Maximum input (To maintain 15% excess air with the standard air orifice and standard combustion air blower.)	60 Hz packaged blower	Capacity @ Chamber Pressure	
		BTU/hr @ "w.c.	kW @ mbar
		168,000 @ -1.0 150,000 @ 0.0 145,000 @ 1.0	49 @ -2,5 44 @ 0,0 42 @ 2,5
Minimum input	Natural Gas, Propane or Butane	BTU/hr 5,000	kW 1,5
Main gas inlet pressure • fuel pressure at gas inlet (Tap "B")	Natural gas Propane or Butane	6.4 "w.c. 6.7 "w.c.	16 mbar 17 mbar
High fire flame length • measured from the burner flange.	Natural gas Propane or Butane	42 in 38 in	1065 mm 965 mm
Maximum chamber temperature	Alloy Tube	°F 1500	°C 815
Flame detection	Flame rod or UV scanner		
Fuel	Natural Gas, Propane or Butane. For any other mixed gas, contact Eclipse Combustion for orifice sizing		




- All information is based on laboratory testing in neutral (0.0"w.c.) chamber with standard combustor design. Different chamber conditions and/or combustor design will affect the data.
- Maximum inputs are given for the standard combustion air blower without an air filter.
- All inputs based upon gross calorific values and standard conditions: 1 atmosphere, 70° F (21°C).
- Blower motor service factors greater than 1.0 may be required when firing into negative chamber pressure applications. For specific application questions, contact your Eclipse Combustion representative.
- Eclipse reserves the right to change the construction and/or configuration of our products at any time without being obliged to adjust earlier supplies accordingly.



Eclipse Combustion

ISO 9001 Registered

Performance Graphs ThermAir TA015

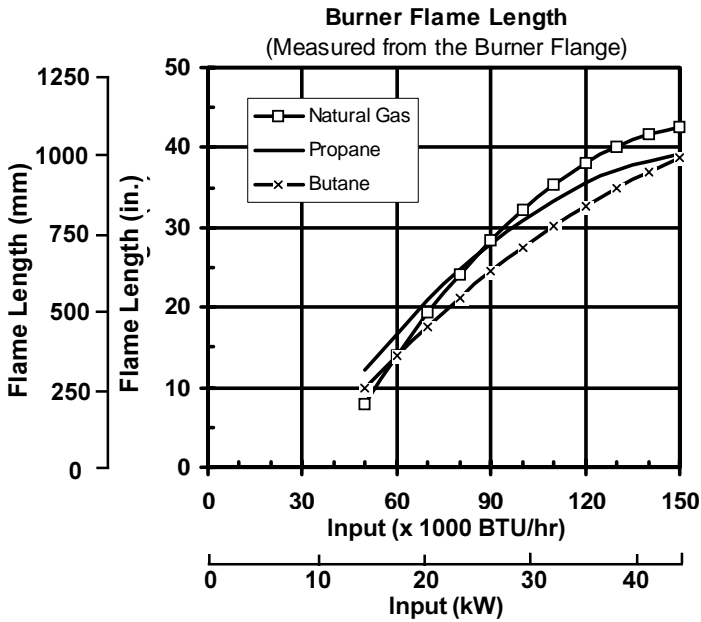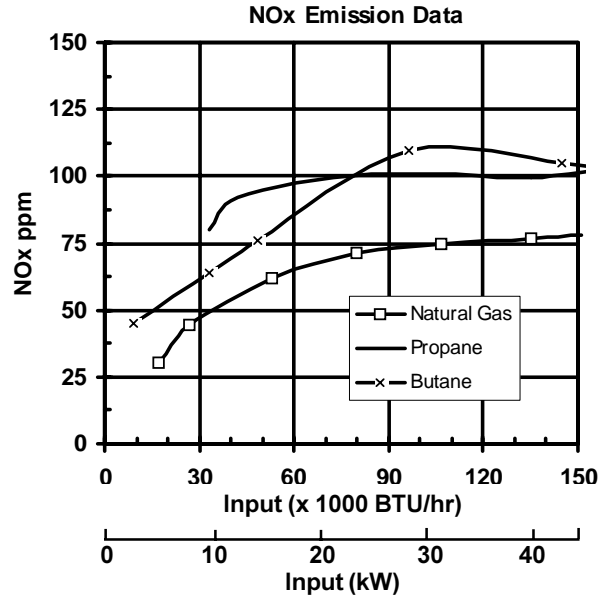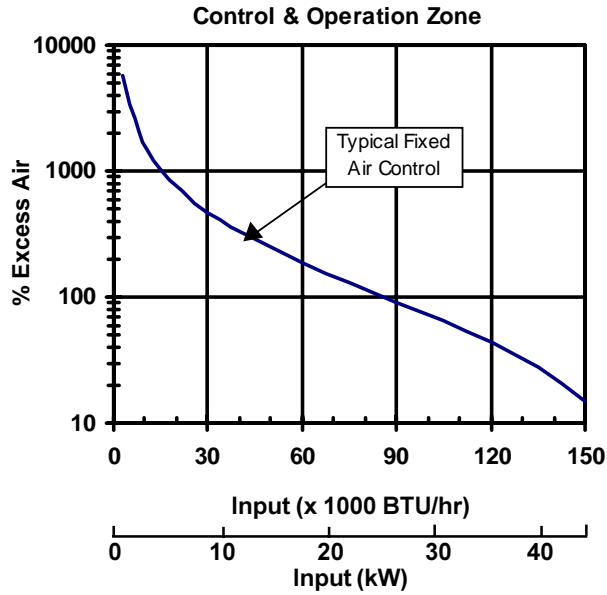

Notes on emission data



NOx emission data is given for:

- Ambient combustion air ~70° F (20° C)
- Minimal process air velocity
- ppm volume dry at 3% O₂
- Neutral chamber pressure

Emissions are influenced by:


- Chamber conditions
- Fuel type
- Firing rate
- Combustion air temperature

CO emission is largely influenced by chamber conditions. Contact your local Eclipse Combustion representative for an estimate of CO emission on your application.

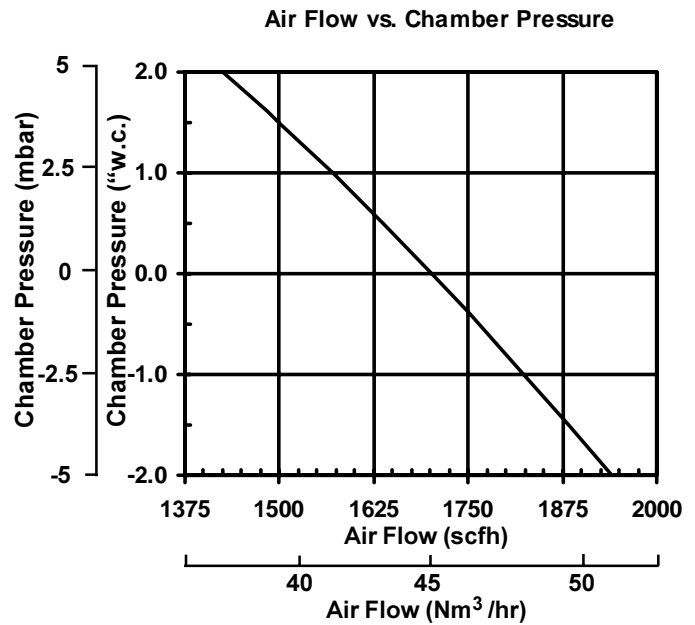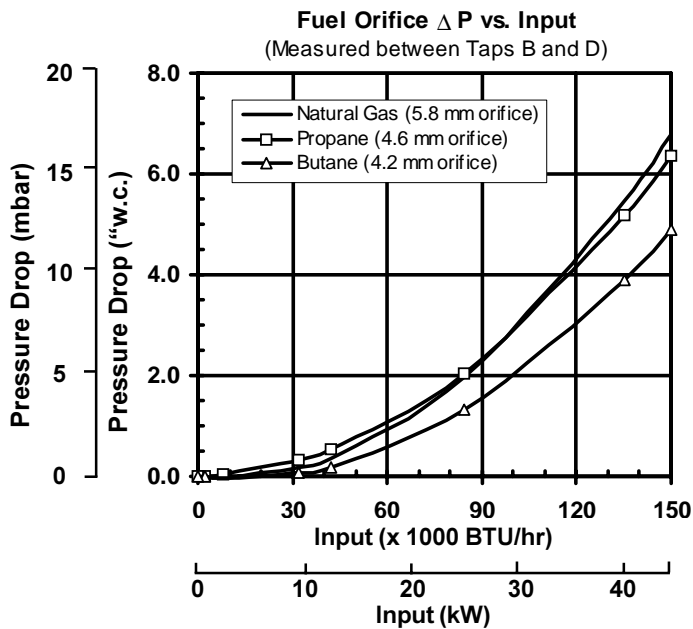


Dimensions-TA015

mm (in)

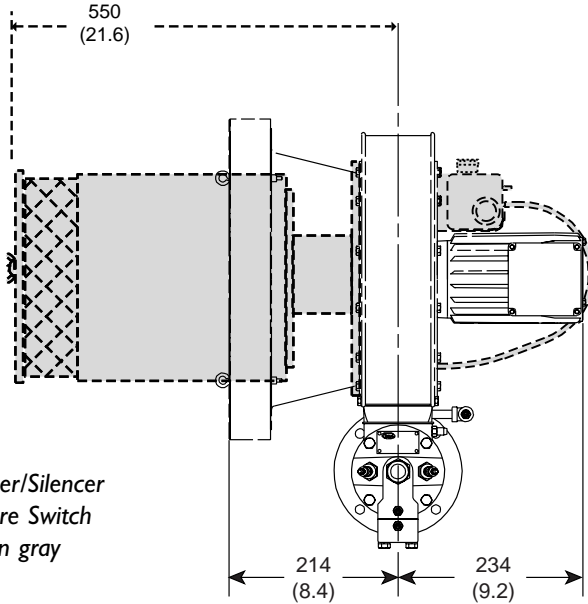


Optional Filter/Silencer and Pressure Switch shown in gray

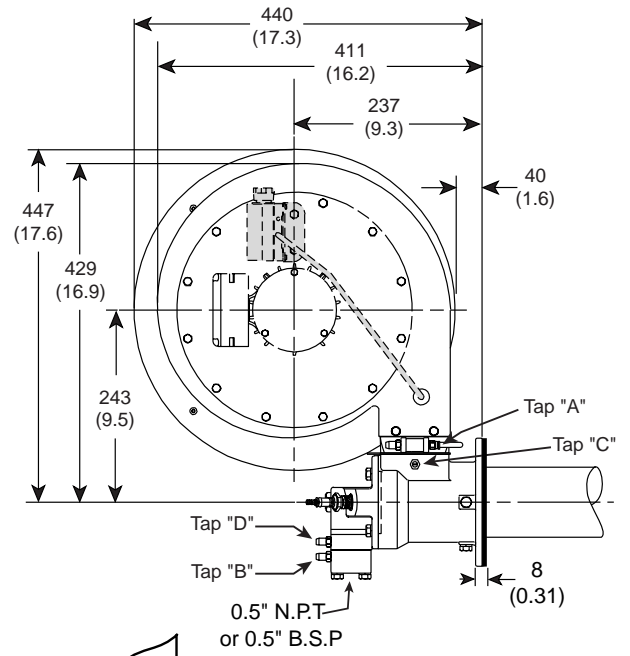


Port Connections	
Sparkplug	14mm
Flamerod or Scanner	0.5" NPT
Peepsight	0.75" NPT

Weights		
	lb	kg
Burner, w/ blower	65	29
Burner, less blower	24	11
Filter/Silencer	21	10




Mounting Pattern

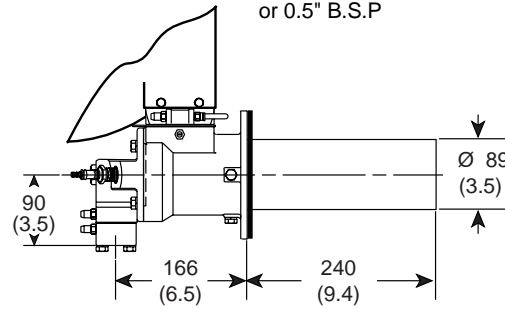

310 Stainless Steel Alloy Tube

Piping

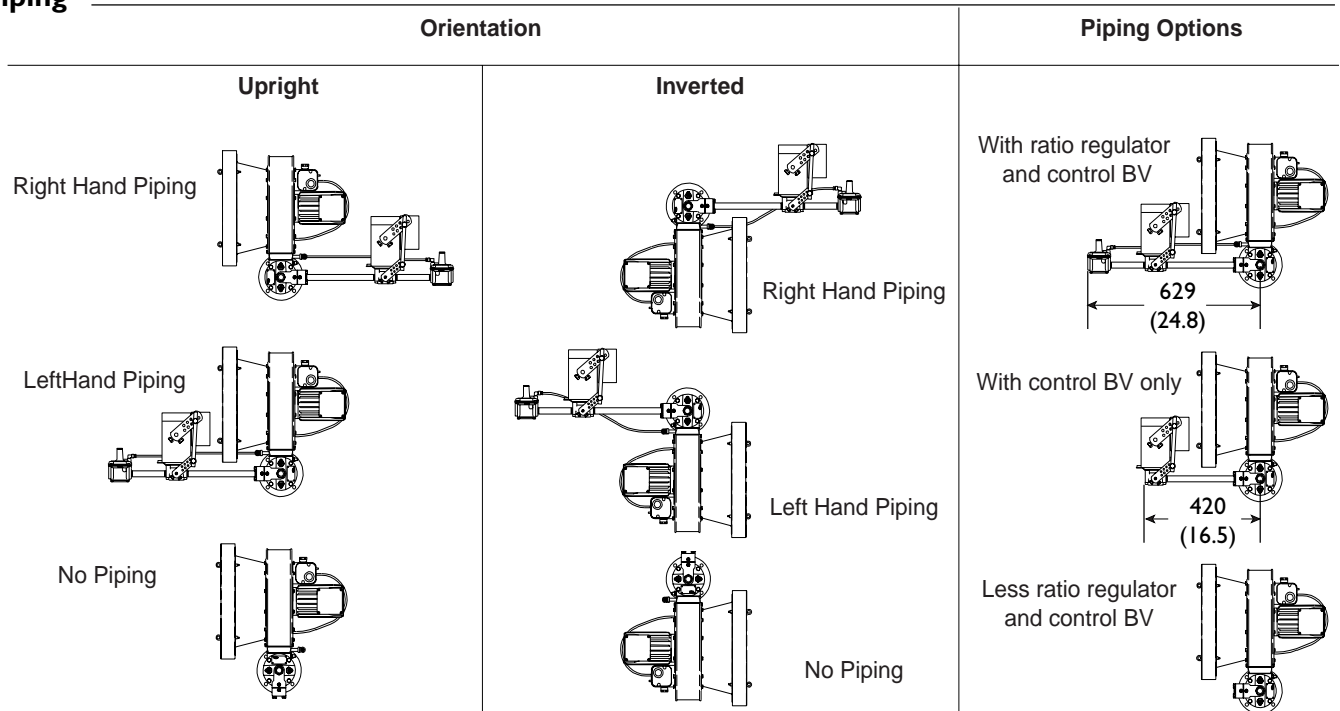



Offered By:

Power Equipment Company
2011 Williamsburg Road
Richmond, Virginia 23231
Phone (804) 236-3800
Fax (804) 236-3882

www.peconet.com